




fast dry™

SCIROCCO™

automatic
dryer & take-up
system

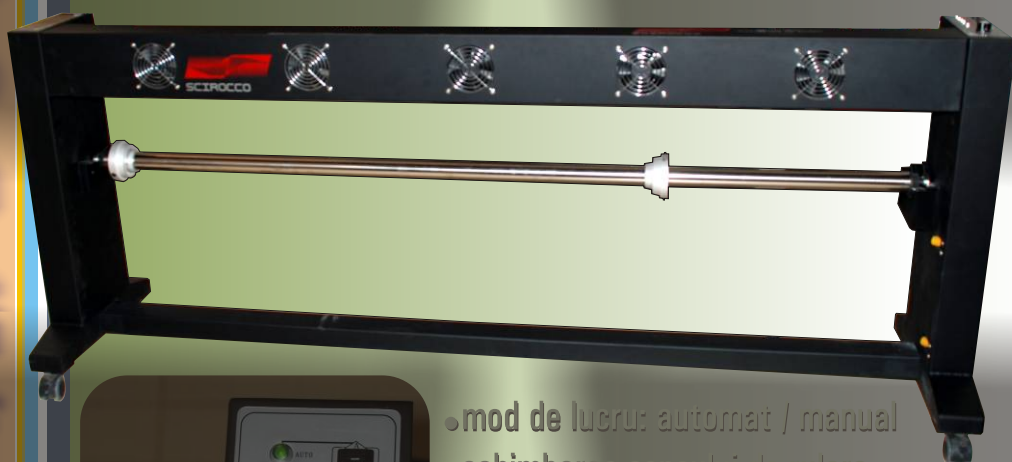


uscator autonom
cu preluare automata
a imprimarilor

• Pozitionare ergonomica a comenzilor.



- mod de lucru: automat / manual
- schimbarea sensului de rulare
- controlul ventilarii si al temperaturii

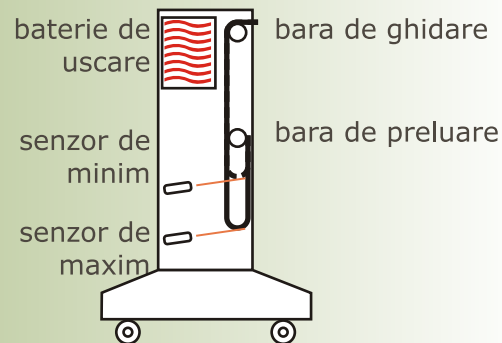

SCIROCCO™ 1600SL Specificatii tehnice

Latimea maxima de lucru	Maxim 1650 mm
Diametrul minim al rolei de preluare	52 mm
Diametrul maxim al rolei de preluare	106 mm
Temperatura de uscare	Temperatura camerei pana la ~ 60°C
Controlul temperaturii	Continuu
Viteza de preluare	Egala cu viteza de imprimare
Reglarea vitezei de preluare	Automat
Schimbarea sensului de rotire	Automat / manual
Tensiunea de alimentare	CA 240 V, 60 Hz
Puterea consumata	1500 W
Puterea consumata de motor (laminare la rece)	6 W
Dimensiuni (H x l x L)	1850 x 500 x 330 mm
Dimensiuni de ambalare (H x l x L)	2100 x 600 x 550 mm
Greutate	60 kg
Garantie	1 an, valabilitate extinsa pana la 2 ani
Mod de uscare	Jet de aer cald / rece

adaptabil la orice imprimanta, autonom, economic